


ÇALPARA ÇEKVALF SWING CHECK VALVE



Boru hatlarında sıvının akış yönünde akmasına izin verirken ters istikamette akmayı engellemek için kullanılan ürünlerdir. Pompa tesislerinde, pompanın devreden çıkması durumunda sıvının geri akmasını engeller. Klape kendi ağırlığı veya karşı kuvvetle kapanır. Çekvalfler sıvının akış yönü dikkat edilerek monte edilmelidir. Sistemin bakımı üst kapak açılarak salıncak sistemli klapeyi kolayca çıkarılıp yenisi takılarak bakımı yapılmış olur. Sıcak ve soğuk su tesislerinde, içme suyu şebekelerinde ve asitli olmayan akışkanlarda rahatlıkla kullanılır.

These are products which allow fluid to flow at flow direction and used for preventing flow of fluid at reverse direction. It prevents back flow of fluid when pump is out of service in pump plant. Flap is closed by its own weight or counter force. Check valves should be installed by considering flow direction of fluid. Maintenance of system is made by opening upper cover and easily removing flap with swinging system and replacing with new one. It can used easily in hot and cold water plants, drinking water network and fluids which are free of acid.


ÇALPARA ÇEKVALF

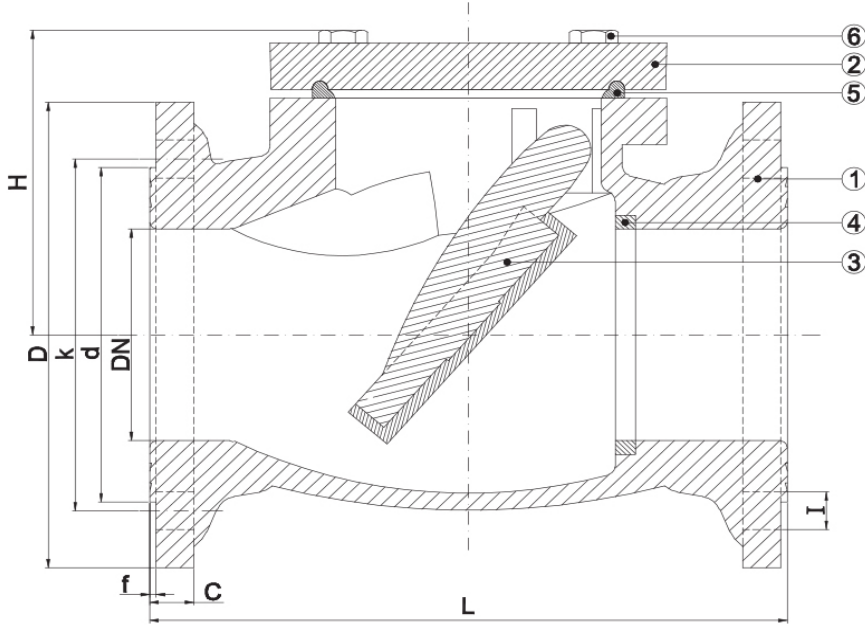

No	Parça İsmi	Malzeme
1	Gövde	EN-GJS-400 (GGG40) EN-GJS-500 (GGG50)
2	Kapak	EN-GJS-400 (GGG40) EN-GJS-500 (GGG50)
3	Klape	EN-GJS-400-500 (GGG40-50) +EPDM Kaplı
4	Burç	MS58
5	Kapak Contası	EPDM
6	Kapak Cıvataları	8.8 Galvanizli

DN (Anma Çapı) (mm)	D (mm)	k (mm)	d (mm)	f (mm)	C (mm)	I Delik Çapı ve adedi	L (mm)	H (mm)	Ağırlık (kg)
Ø50 (PN10-16-25)	165	125	99	3	20	Ø19x4 adet	200	124	13
Ø65 (PN10-16-25)	185	145	118	3	20	Ø19x4 adet	240	153	18
Ø80 (PN10-16-25)	200	160	132	3	22	Ø19x8 adet	260	150	23
Ø100 (PN10-16)	220	180	156	3	24	Ø19x8 adet	300	144	27
Ø100 (PN25)	235	190	156	3	28	Ø23x8 adet	300	144	27
Ø125 (PN10-16)	250	210	184	3	26	Ø19x8 adet	350	165	40
Ø125 (PN25)	270	220	184	3	30	Ø28x8 adet	350	165	44
Ø150 (PN10-16)	285	240	211	3	26	Ø23x8 adet	400	198	55
Ø150 (PN25)	300	250	211	3	34	Ø28x8 adet	400	198	60
Ø200 (PN10)	340	295	266	4	26	Ø23x8 adet	500	227	90
Ø200 (PN16)	340	295	266	4	30	Ø23x12 adet	500	227	90
Ø200 (PN25)	360	310	274	4	34	Ø28x12 adet	500	227	99
Ø250 (PN10)	395	350	319	4	28	Ø23x12 adet	600	240	140
Ø250 (PN16)	405	355	319	4	32	Ø28x12 adet	600	240	140
Ø250 (PN25)	425	370	330	4	36	Ø31x12 adet	600	240	154
Ø300 (PN10)	445	400	370	4	28	Ø23x12 adet	700	245	190
Ø300 (PN16)	460	410	370	4	32	Ø28x12 adet	700	245	190
Ø300 (PN25)	485	430	389	4	40	Ø31x16 adet	700	245	209

SWING CHECK VALVE

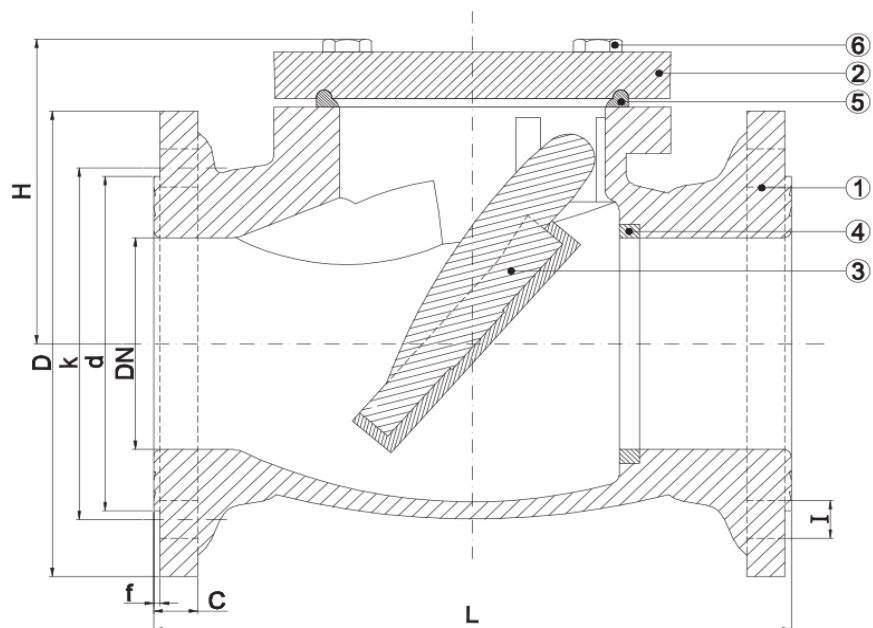

No	Part Name	Material
1	Body	EN-GJS-400 (GGG40) EN-GJS-500 (GGG50)
2	Cover	EN-GJS-400 (GGG40) EN-GJS-500 (GGG50)
3	Disc	EN-GJS-400-500 (GGG40-50) +EPDM Coated
4	Bearing	MS58
5	Cover Gasket	EPDM
6	Cover Bolts	8.8 Galvanized

DN (Nominal Diameter) (mm)	D (mm)	k (mm)	d (mm)	f (mm)	C (mm)	I Hole Diameter and pcs	L (mm)	H (mm)	Weight (kg)
Ø50 (PN10-16-25)	165	125	99	3	20	Ø19x4 pcs	200	124	13
Ø65 (PN10-16-25)	185	145	118	3	20	Ø19x4 pcs	240	153	18
Ø80 (PN10-16-25)	200	160	132	3	22	Ø19x8 pcs	260	150	23
Ø100 (PN10-16)	220	180	156	3	24	Ø19x8 pcs	300	144	27
Ø100 (PN25)	235	190	156	3	28	Ø23x8 pcs	300	144	27
Ø125 (PN10-16)	250	210	184	3	26	Ø19x8 pcs	350	165	40
Ø125 (PN25)	270	220	184	3	30	Ø28x8 pcs	350	165	44
Ø150 (PN10-16)	285	240	211	3	26	Ø23x8 pcs	400	198	55
Ø150 (PN25)	300	250	211	3	34	Ø28x8 pcs	400	198	60
Ø200 (PN10)	340	295	266	4	26	Ø23x8 pcs	500	227	90
Ø200 (PN16)	340	295	266	4	30	Ø23x12 pcs	500	227	90
Ø200 (PN25)	360	310	274	4	34	Ø28x12 pcs	500	227	99
Ø250 (PN10)	395	350	319	4	28	Ø23x12 pcs	600	240	140
Ø250 (PN16)	405	355	319	4	32	Ø28x12 pcs	600	240	140
Ø250 (PN25)	425	370	330	4	36	Ø31x12 pcs	600	240	154
Ø300 (PN10)	445	400	370	4	28	Ø23x12 pcs	700	245	190
Ø300 (PN16)	460	410	370	4	32	Ø28x12 pcs	700	245	190
Ø300 (PN25)	485	430	389	4	40	Ø31x16 pcs	700	245	209